


Dimensions in mm.

FEATURES CARATTERISTICHE		
MODEL MODELLO		103 - H7123 - 0140
BASIC STEP ANGLE		$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT	(Amp)	0.7 <sup>(*)</sup>
UNIPOLAR CURRENT	(Amp)	1.0
RESISTANCE	(Ohm)	6.7
INDUCTANCE	(mH)	15
BIPOLAR HOLDING TORQUE	(Ncm)	110
UNIPOLAR HOLDING TORQUE	(Ncm)	85
ROTOR INERTIA	(Kg $\cdot$ m $^2$ x 10 $^{-7}$ )	210
THEORETICAL ACCELERATION	(rad x sec. $^{-2}$ )	50000
BACK E.M.F.	(V/Krpm)	60
MASS	(Kg)	0.65
LEADS CODE		IV



<sup>(\*)</sup> Bipolar series connection.  
<sup>(\*)</sup> Collegamento bipolare serie.

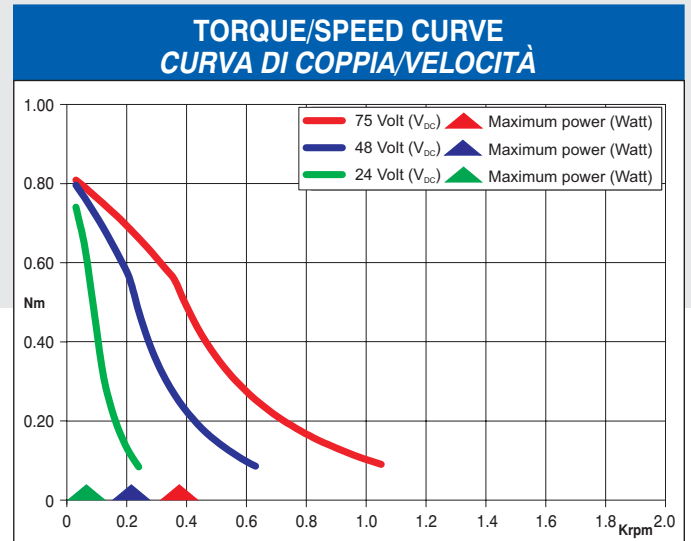

Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series.